


# BELOW THE HOOK LIFTING NEEDS ANALYSIS: ADJUSTABLE SPREADER BEAM – MODEL 38

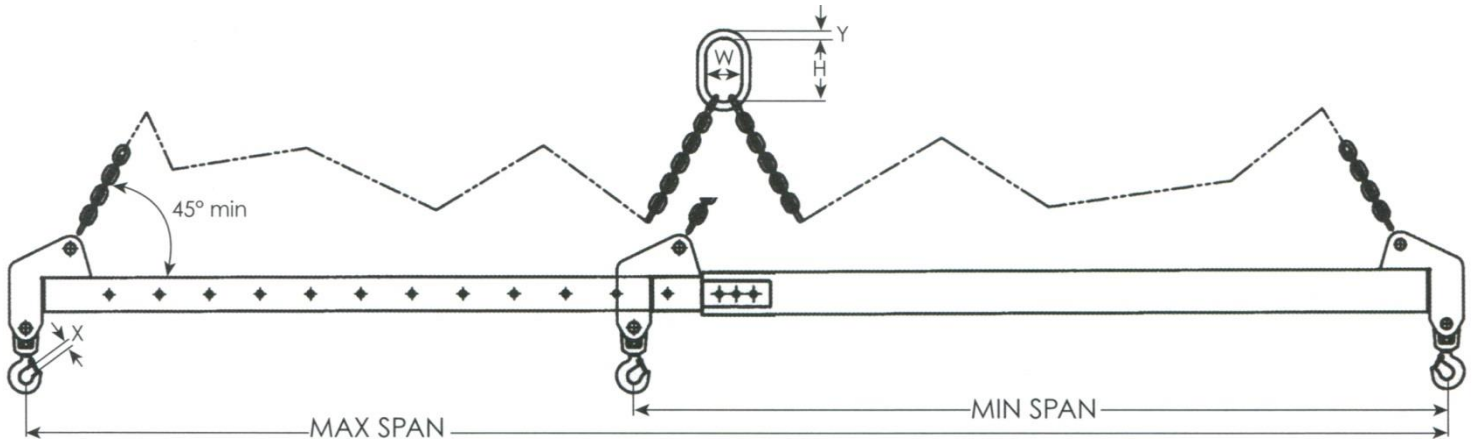

**Adjustable Spreader Beam  
Nominal Dimensions**

Telescopic adjustable spread

Available with standard chain or wire rope rigging

Capacity	Span in Feet (Min to Max)				Inch			
	4 to 6	6 to 10	8 to 14	12 to 20	H	Y	W	X
2 Ton	38-2-4/6	38-2-6/10	38-2-8/14	38-2-12/20	6	5/8	3	1
5 Ton	38-5-4/6	38-5-6/10	38-5-8/14	38-5-12/20	7	1	3-1/2	1-3/8
10 Ton	38-10-4/6	38-10-6/10	38-10-8/14	38-10-12/20	8-3/4	1-1/4	4-3/8	1-5/8

**Design Your Own Adjustable Spreader Beam: (Engineering must approve any modification)**

Capacity: \_\_\_\_\_ Span Range: \_\_\_\_\_ Headroom Restrictions: \_\_\_\_\_

H: \_\_\_\_\_ Y: \_\_\_\_\_ W: \_\_\_\_\_ X: \_\_\_\_\_

Notes / Crane Hook Requirements: \_\_\_\_\_



**Wisconsin Lifting Specialists**

**“The SMART CHOICE in Lifting and Rigging Products”**

Toll Free: 800-242-4449

[www.wisconsinlifting.com](http://www.wisconsinlifting.com)

**Client Contact Information:**

Company: \_\_\_\_\_

Contact: \_\_\_\_\_

Phone / Fax: \_\_\_\_\_

Email: \_\_\_\_\_